




# Ultrasonic Thickness Gauge

## Multigaugage 5300 / 5350 GRP


The Multigaugage 5300 is a simple, robust ultrasonic thickness gauge designed to check the condition of Glass Reinforced Plastic (GRP) or Engineering Plastics. It can also be used on uncoated metal. The easy to use keypad allows operator interface, whilst the bright colour LCD display can be used in all light conditions. The moulded soft rubber surround feels comfortable, looks good and provides extra protection against knocks and scrapes.

All probes have Intelligent Probe Recognition (IPR), which automatically adjusts settings in the gauge at the same time as transmitting recognition data - the result is a perfectly matched probe and gauge for enhanced performance.

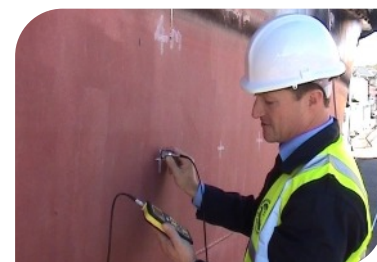

## Features

- Measures GRP or all types of engineering plastic
- Large colour LCD display giving user information.
- No zeroing required.
- Single crystal hard faced probe.
- Easy calibration with menu driven buttons.
- Intelligent Probe Recognition (IPR).
- Echo strength indicator.
- Datalogging version with wireless data transmission.
- 3 year warranty.
- Free calibration for the life of the gauge.

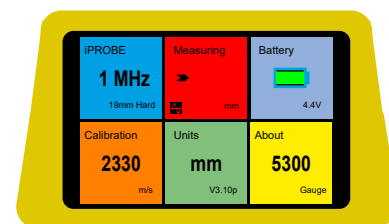

## Easy Menu System

## Typical Applications

- Leisure Craft
- Yachts
- Potable Water Tanks
- GRP Storage Tanks
- Marine Surveying
- Engineering Plastics
- Non Coated Metal



simple . accurate . robust

# Datalogging (Multigaugage 5350)

Measurements can be logged using a grid or string format. The gauge will store up to 895 files, each containing 100 records. Each record can store either a string of 250 or grid of 16 x 16 measurements. The simple, easy to use menu guides the user through intuitive setup procedures.

The gauge uses wireless technology to transmit the measurements to the PC where dedicated Communicator software allows the analysis of the results or easy production of templates using wizards. Measurements are stored in a .txt format so that they can be opened in other applications.

Measurements can also be displayed remotely on a PC up to 1000 metres away.



## Specification

|  |  |
|--|--|
| <b>Sound Velocity Range</b>              | From 1000 m/s to 8000 m/s (0.0394 in/ $\mu$ s to 0.3150 in/ $\mu$ s) |
| <b>Single Crystal Hard Faced Probe</b>   | 1 MHz  |
| <b>Probe Measurement Range</b>           | 2 - 300 mm (0.080" to 11")   |
| <b>Probe Sizes</b>                       | 19 mm (0.75")  |
| <b>Resolution</b>                        | 0.1 mm (0.005")  |
| <b>Accuracy</b>                          | $\pm 0.1$ mm (0.005")  |
| <b>Display</b>                           | Multi character colour LCD   |
| <b>Batteries</b>                         | 3 x disposable AA alkaline batteries or rechargeable NiMH / NiCD     |
| <b>Battery Life</b>                      | Up to 50 Hours continuous use using alkaline batteries               |
| <b>Gauge Dimensions</b>                  | 147 mm x 90 mm x 28 mm (5.75" X 3.5" X 1")                           |
| <b>Gauge Weight</b>                      | 325 g (11.5 ounces) including batteries                              |
| <b>Environmental</b>                     | Case rated to IP65. RoHS and WEEE compliant                          |
| <b>Operating Temperature</b>             | -10°C to +50°C (14°F to 122°F)                                       |
| <b>Storage Temperature</b>               | -10°C to +60°C (14°F to 140°F)                                       |
| <b>Multigaugage 5350 Datalogger Only</b> |  |
| <b>Storage capacity</b>                  | 32 Mb  |
| <b>Data Transmission</b>                 | Wireless RF  |

The Tritex Multigaugage 5300 and Multigaugage 5350 gauges have been manufactured to comply with British Standard BS EN 15317:2007, which covers the characterisation and verification of ultrasonic thickness measuring equipment.



### Kit Contents:

Multigaugage 5300 or Multigaugage 5350 gauge, hard faced probe, probe lead, ultrasonic gel, 15mm test block, batteries, manual, calibration certificate, carry case.

Optional leather case.

**Multigaugage 5350 Datalogger Only**  
Transceiver, Communicator software

## Contact

### UK Office:

**Tritex NDT Ltd**  
Unit 10, Mellstock Business Park,  
Higher Bockhampton, Dorchester,  
Dorset, United Kingdom, DT2 8QJ  
t: +44 (0) 1305 257160  
f: +44 (0) 1305 259573  
e: sales@tritexndt.com  
w: www.tritexndt.com

### USA Office:

**Tritex NDT LLC**  
1533 Stuyvesant Avenue,  
Union, New Jersey,  
07083, United States  
t: +1 908 688 6706  
f: +1 908 688 9040  
e: sales.us@tritexndt.com  
w: www.tritexndt.com



**3 YEAR WARRANTY**



simple . accurate . robust