


Peacock lever-type dial test indicators

- Measuring range: up to 1 mm.
- Graduation: 0.01, 0.002 or 0.001 mm.
- With dovetail joint and clamping stem $\varnothing 6$ mm.
- Measuring force: < 0.3 N.
- Tungsten carbide stylus tip: $\varnothing 2$ mm.
- Insert thread: M1.7.

Inserts for lever-type dial test indicators

| Item No. | Effective length (EL)/mm | Ball \varnothing /mm |
|--|--------------------------|------------------------|
| For 855.601: | | |
| 859.016 | 17.74 | 2 |
| 859.152 | 17.74 | 1 |
| 859.151 | 17.74 | 0.8 |
| 859.290 | 17.74 | 0.5 |
| For 855.602: | | |
| 859.126 | 39.00 | 2 |
| 859.291 | 39.00 | 1 |
| 859.292 | 39.00 | 0.8 |
| 859.293 | 39.00 | 0.5 |
| For 855.603, 855.605 and 855.606: | | |
| 859.200 | 14.18 | 2 |
| 859.294 | 14.18 | 1 |
| 859.295 | 14.18 | 0.8 |
| 859.296 | 14.18 | 0.5 |
| For 855.604: | | |
| 859.259 | 8.13 | 2 |
| 859.297 | 8.13 | 1 |
| 859.298 | 8.13 | 0.8 |
| 859.299 | 8.13 | 0.5 |
| For 855.611: | | |
| 859.464 | 19.24 | 2 |
| 859.465 | 19.24 | 1 |
| 859.466 | 19.24 | 0.8 |
| 859.467 | 19.24 | 0.5 |

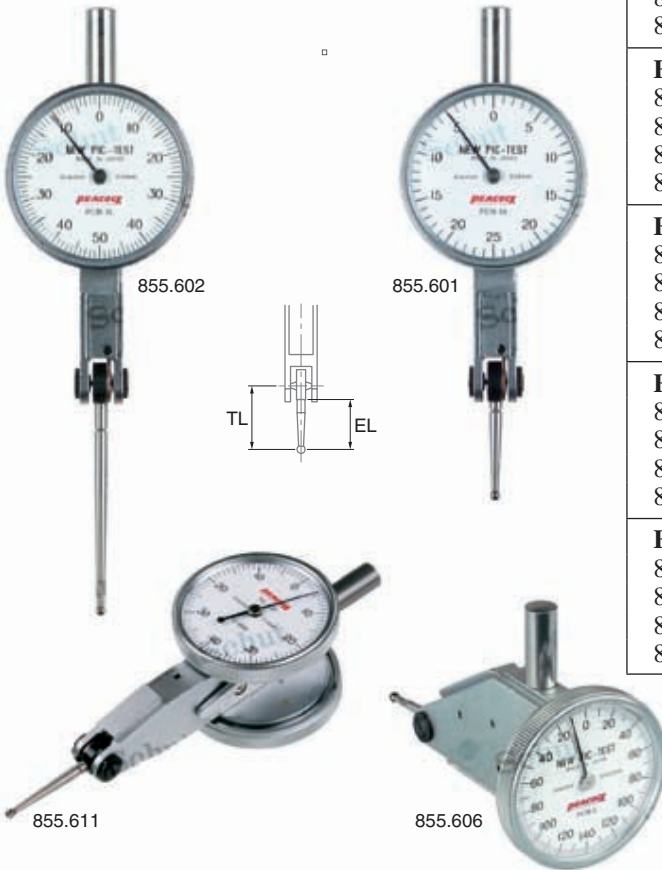

| Item No. | Measuring range/mm | Graduation mm | Dial \varnothing /mm | Scale numbering | Insert | Total insert length (TL)/mm |
|-----------------------|--------------------|---------------|------------------------|-----------------|---------|-----------------------------|
| Horizontal: | | | | | | |
| 855.601 | 0.5 | 0.01 | 35 | 0-25-0 | 859.016 | 21.3 |
| 855.602 | 1 | 0.01 | 35 | 0-50-0 | 859.126 | 42.8 |
| 855.603 | 0.28 | 0.002 | 35 | 0-140-0 | 859.200 | 17.8 |
| 855.604 | 0.14 | 0.001 | 30 | 0-70-0 | 859.259 | 11.7 |
| 855.605 | 0.5 | 0.01 | 35 | 0-25-0 | 859.200 | 17.8 |
| Perpendicular: | | | | | | |
| 855.606 | 0.28 | 0.002 | 35 | 0-140-0 | 859.200 | 17.8 |
| 855.611 | 0.8 | 0.01 | 35 | 0-40-0 | 859.464 | 21.8 |